

## Rod Mooring Buoys

### Heavy Duty Rod Buoys

Norfloat International's RB range of heavy duty inflatable rod mooring buoys have been used by harbours, local authorities, sailing associations and mooring contractors for nearly 50 years.

### Features

#### UV stabilised PVC

Manufactured from a UV stabilised marine grade PVC, Norfloat International's inflatable buoys will not degrade.

#### Foam filled (optional)

For specialised applications, Norfloat International's RB range of mooring buoys can be pressure filled using marine grade polyurethane foam, to a density of 36kg per cubic metre.

#### Heavy duty steel rod and swivel

Manufactured from 18mm galvanised steel rod, together with the forged Norfloat International swivel eye, Norfloat International's RB range provides reliability, quality and value for money. Special steels designed for corrosive water applications are also available (see NRB90BM shown in yellow with top swivel and fixed lower eye). A new non swivel version is also available upon request.


#### Lettering

Irremovable lettering and numbering can be moulded into the buoys at time of manufacture. This is ideal for identification.

#### Valve

The Norfloat International valve is reliable and effective, allowing easy inflation and deflation. The valve is sealed using a coarse threaded plastic screw which is impossible to cross thread. The plastic design ensures seawater will not cause corrosion or seizure.

Important: When moored, please ensure the lower swivel eye is used. Norfloat does not recommend using the large top eye for mooring connection.

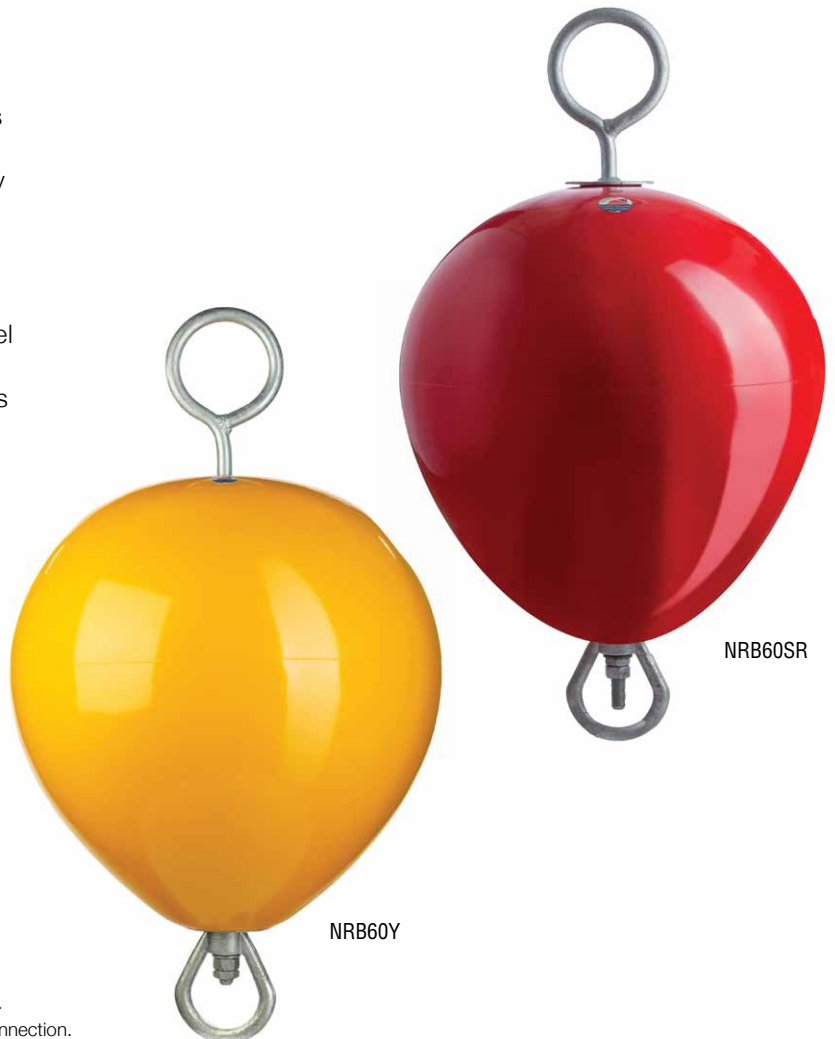

## Specifications

### Material

Rotationally moulded UV stable marine grade PVC

### Foam fill

Marine grade polyurethane

### Steel rod/swivel

Hot-dipped galvanised centre rod  
Forged swivel, certificated to 5 ton

### Colours

Available in Black, Grey, White, Navy Blue, Royal Blue, Signal Green, Signal Red, Fluorescent Orange and Yellow.



### Inflatable

Product code	Circle cm	Diameter cm	Buoyancy kg	Reserve buoyancy kg	Max chain kg	Rod size mm
NRB40	102	32	15	12	6	18
NRB50	127	40	31	26	13	18
NRB60	152	48	55	50	25	18
NRB75	190	61	110	105	55	18
NRB90	228	73	204	191	93	18

### Foamed

Product code	Circle cm	Diameter cm	Buoyancy kg	Reserve buoyancy kg	Max chain kg	Rod size mm
NRBF40	102	32	15	11	5	18
NRBF50	127	40	31	24	11	18
NRBF60	152	48	55	47	22	18
NRBF75	190	61	110	100	50	18
NRBF90	228	73	204	183	85	18

Important: When moored, please ensure the lower swivel eye is used.  
Norfloat does not recommend using the large top eye for mooring connection.

Although every effort is made to provide accurate information, dimensions and weights may vary slightly.  
Norfloat International reserves the right to change specifications without notice.



NRB90BM