


Grade 3 Long Link Chain

Grade 3 Long Link Chain - Finish: Self Colour Test: Batch Tested and Certified

Manufactured from low carbon mild steel material, this chain is manufactured on both semi-automatic and fully automatic chain making machines with flash butt welded joints. All sizes of chain are proof load tested at the end of the manufacturing process. All chain is embossed at every 20th link or 1m intervals with a four digit batch number for purposes of traceability.

Predominantly used for onshore and offshore mooring systems for commercial and leisure craft, navigation buoy moorings and aquaculture mooring grid systems, but also applications within the industrial and agricultural markets. The larger internal dimensions of this type of chain make it a more popular product as it can accommodate larger shackles or alternative associated end fittings.

Chain diameter range: 7mm – 26mm, available in both self colour and hot dip galvanized finishes (larger sizes available upon request). Bespoke assemblies can be manufactured on application. Supplied in full drum lengths or cut to specific customer requirements.

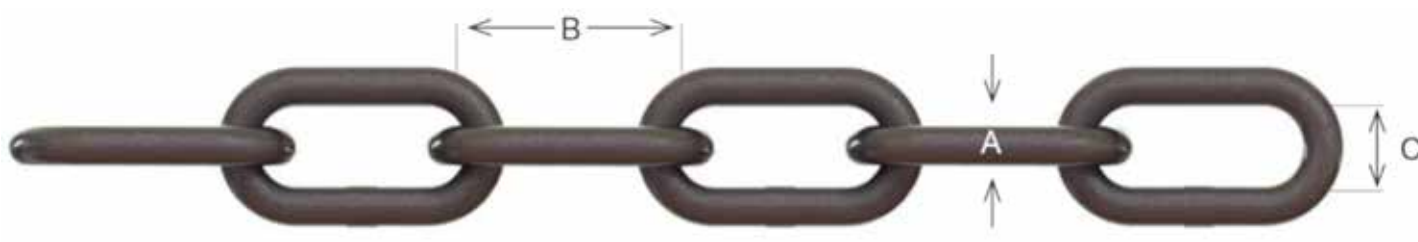

Part Code	Chain Size (mm)	A (mm)	B (mm)	C (mm)	Service Load (t)**	M.B.L (t)	Meter Per Drum	Weight Per M (kg)
NHC07042LS	7	7	42	14	480 Kg	1.9	500	0.89
NHC08052LS	8	8	52	16	500 Kg	2.0	400	1.10
NHC95050LS	9.5	9.5	50	19	1.00	4.0	300	1.65
NHC12061LS	12	12	62	22	1.25	5.0	175	2.68
NHC12081LS	13	13	81	22	1.50	6.0	150	2.95
NHC16100LS	16	16	100	24	2.50	10.0	100	4.30
NHC18090LS	18	18	90	30	3.50	14.0	100	5.88
NHC20100LS	20	20	100	30	4.00	16.0	125	7.20
NHC22111LS	22	22	111	33	5.00	20.0	100	8.65
NHC26125LS	25	26	125	42	6.25	25.0	100	12.30


Grade 3 Long Link Chain

Grade 3 Long Link Chain - Finish: Hot Dip Galvanized Test: Batch Tested and Certified

Manufactured from low carbon mild steel material, this chain is manufactured on both semi-automatic and fully automatic chain making machines with flash butt welded joints. All sizes of chain are proof load tested at the end of the manufacturing process. All chain is embossed at every 20th link or 1m intervals with a four digit batch number for purposes of traceability.

Predominantly used for onshore and offshore mooring systems for commercial and leisure craft, navigation buoy moorings and aquaculture mooring grid systems, but also applications within the industrial and agricultural markets. The larger internal dimensions of this type of chain make it a more popular product as it can accommodate larger shackles or alternative associated end fittings.

Chain diameter range: 7mm – 26mm, available in both self colour and hot dip galvanized finishes (larger sizes available upon request). Bespoke assemblies can be manufactured on application. Supplied in full drum lengths or cut to specific customer requirements.

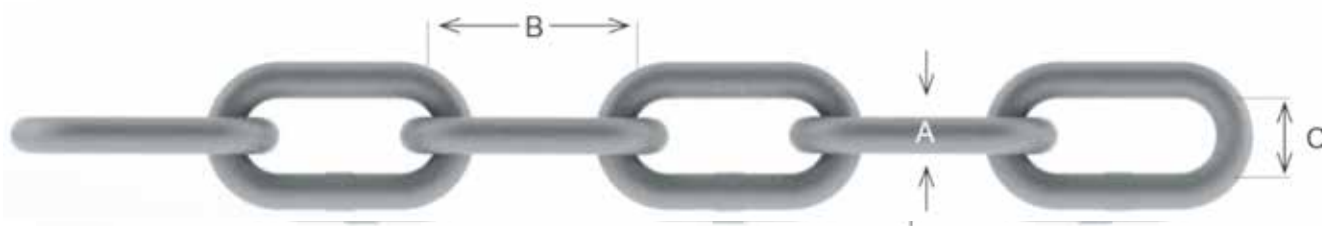

Part Code	Chain Size (mm)	A (mm)	B (mm)	C (mm)	Service Load (t)**	M.B.L (t)	Meter Per Drum	Weight Per M (kg)
NHC07042LG	7	7	42	14	480 Kg	1.9	500	0.90
NHC08052LG	8	8	52	16	500 Kg	2.0	400	1.15
NHC95050LG	9.5	9.5	50	19	1.00	4.0	300	1.75
NHC12061LG	12	12	62	22	1.25	5.0	175	2.80
NHC12081LG	13	13	81	22	1.50	6.0	150	3.04
NHC16100LG	16	16	100	24	2.50	10.0	100	4.45
NHC18090LG	18	18	90	30	3.50	14.0	100	6.10
NHC20100LG	20	20	100	30	4.00	16.0	125	7.45
NHC22111LG	22	22	111	33	5.00	20.0	100	8.95
NHC26125LG	25	26	125	42	6.25	25.0	100	12.65