


### Grade 3 Calibrated Short Link Chain

**Grade 3 Calibrated Short Link Chain - Finish: Self Colour Test: Batch Tested and Certified**

Grade 3 Calibrated Short Link Chain - Finish: Self Colour Test: Batch Tested and Certified

Manufactured from low carbon mild steel material, this chain is manufactured on automatic chain making machines with flash butt welded joints. All sizes of chain are calibrated during manufacture, then proof load tested at the end of the process. All chain is embossed at every 20th link or 1m intervals with a four digit batch number for purposes of traceability. Predominantly used in non-safety critical applications within the industrial, agricultural / marine markets. Chain diameter range: 6mm – 32mm, available in both self colour and hot dip galvanized finishes (larger sizes available upon request). Bespoke assemblies can be manufactured on application. Supplied in full drum lengths or cut to specific customer requirements.

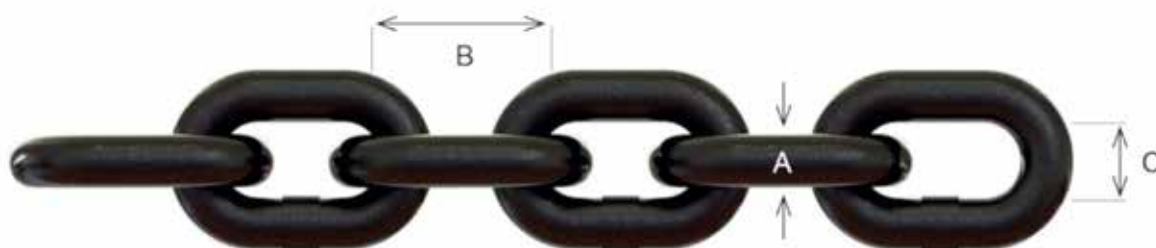


| Part Code  | Chain Size (mm) | A (mm) | B (mm) | C (mm) | Service Load (t)** | M.B.L (t) | Meter Per Drum | Weight Per M (kg) |
|------------|-----------------|--------|--------|--------|--------------------|-----------|----------------|-------------------|
| NHC060G3SS | 6               | 6      | 18.5   | 8      | 400 Kg             | 1.6       | 500            | 0.78              |
| NHC070G3SS | 7               | 7      | 22     | 9      | 600 Kg             | 2.4       | 500            | 1.10              |
| NHC080G3SS | 8               | 8      | 24     | 12     | 750 Kg             | 3.0       | 350            | 1.40              |
| NHC100G3SS | 10              | 10     | 30     | 14     | 1.25               | 5.0       | 250            | 2.20              |
| NHC10DG3SS | 10              | 10     | 28     | 14     | 1.50               | 6.0       | 250            | 2.10              |
| NHC120G3SS | 12              | 12     | 36     | 16     | 1.75               | 7.0       | 150            | 3.20              |
| NHC125G3SS | 12.5            | 12.5   | 39.9   | 18     | 1.90               | 7.8       | 150            | 3.30              |
| NHC130G3SS | 13              | 13     | 36     | 18     | 2.00               | 8.0       | 150            | 3.80              |
| NHC140G3SS | 14              | 14     | 42     | 19     | 2.25               | 9.0       | 125            | 4.25              |
| NHC160G3SS | 16              | 16     | 48     | 22     | 3.12               | 12.5      | 100            | 5.60              |
| NHC200G3SS | 20              | 20     | 60     | 30     | 5.00               | 20.0      | 50             | 8.50              |
| NHC220G3SS | 22              | 22     | 66     | 33     | 5.75               | 23.0      | 50             | 10.70             |
| NHC260G3SS | 26              | 26     | 78     | 38     | 8.13               | 32.5      | 50             | 15.00             |
| NHC280G3SS | 28              | 28     | 84     | 42     | 9.50               | 38.0      | 50             | 17.60             |
| NHC320G3SS | 32              | 32     | 96     | 48     | 11.50              | 46.0      | 25             | 22.75             |

\*\* Not to be used for lifting

### Grade 3 Calibrated Short Link Chain

**Grade 3 Calibrated Short Link Chain - Finish: Hot Dip Galvanized Test: Batch Tested and Certified**

Manufactured from low carbon mild steel material, this chain is manufactured on automatic chain making machines with flash butt welded joints. All sizes of chain are calibrated during manufacture, then proof load tested at the end of the process. All chain is embossed at every 20th link or 1m intervals with a four digit batch number for purposes of traceability. Predominantly used in non-safety critical applications within the industrial, agricultural / marine markets. Chain diameter range: 6mm – 32mm, available in both self colour and hot dip galvanized finishes (larger sizes available upon request). Bespoke assemblies can be manufactured on application. Supplied in full drum lengths or cut to specific customer requirements.

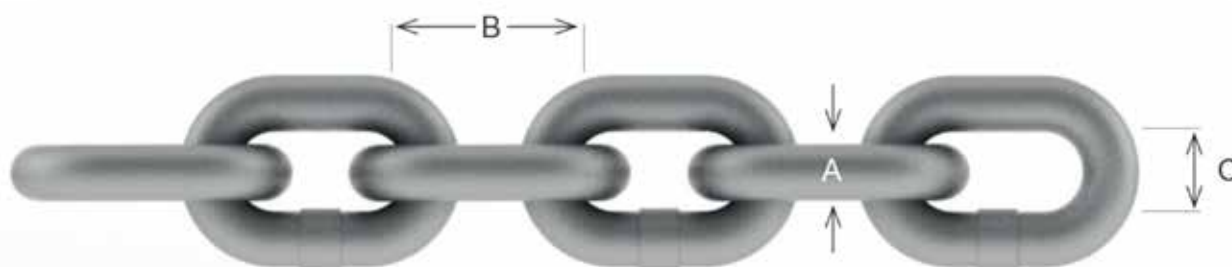

| Part Code  | Chain Size (mm) | A (mm) | B (mm) | C (mm) | Service Load (t)** | M.B.L (t) | Meter Per Drum | Weight Per M (kg) |
|------------|-----------------|--------|--------|--------|--------------------|-----------|----------------|-------------------|
| NHC060G3SG | 6               | 6      | 18.5   | 8      | 400 Kg             | 1.6       | 500            | 0.80              |
| NHC070G3SG | 7               | 7      | 22     | 9      | 600 Kg             | 2.4       | 500            | 1.15              |
| NHC080G3SG | 8               | 8      | 24     | 12     | 750 Kg             | 3.0       | 350            | 1.42              |
| NHC100G3SG | 10              | 10     | 30     | 14     | 1.25               | 5.0       | 250            | 2.25              |
| NHC10DG3SG | 10              | 10     | 28     | 14     | 1.50               | 6.0       | 250            | 2.20              |
| NHC120G3SG | 12              | 12     | 36     | 16     | 1.75               | 7.0       | 150            | 3.25              |
| NHC125G3SG | 12.5            | 12.5   | 39.9   | 18     | 1.90               | 7.8       | 150            | 3.40              |
| NHC130G3SG | 13              | 13     | 36     | 18     | 2.00               | 8.0       | 150            | 3.90              |
| NHC140G3SG | 14              | 14     | 42     | 19     | 2.25               | 9.0       | 125            | 4.40              |
| NHC160G3SG | 16              | 16     | 48     | 22     | 3.12               | 12.5      | 100            | 5.80              |
| NHC200G3SG | 20              | 20     | 60     | 30     | 5.00               | 20.0      | 50             | 8.75              |
| NHC220G3SG | 22              | 22     | 66     | 33     | 5.75               | 23.0      | 50             | 11.00             |
| NHC260G3SG | 26              | 26     | 78     | 38     | 8.13               | 32.5      | 50             | 15.50             |
| NHC280G3SG | 28              | 28     | 84     | 42     | 9.50               | 38.0      | 50             | 18.00             |
| NHC320G3SG | 32              | 32     | 96     | 48     | 11.50              | 46.0      | 25             | 23.45             |

\*\* Not to be used for lifting